




Integration **F-ISC100**

Instant gratification

2 way coaxial kit

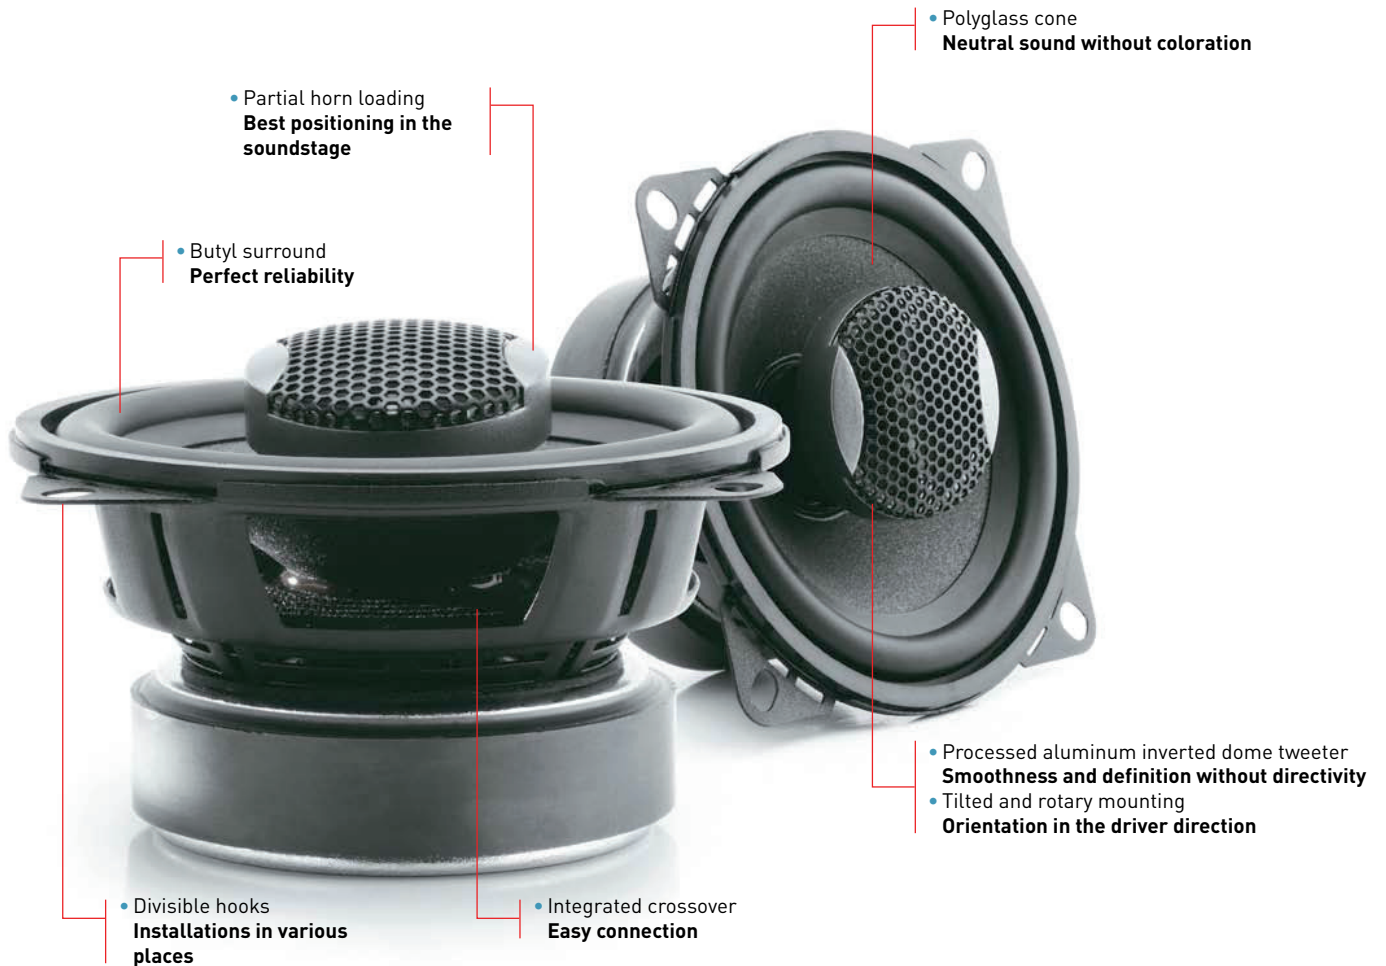

ADVANTAGES

- High sensitivity
- Shallow mounting depth (49 mm)
- Great improvement from original car speakers
- Dynamics and neutrality
- Soundstage orientation

TECHNICAL CHARACTERISTICS

Woofers: 4" (100mm)
Voice-coil diameter: 1" (25.5mm)
Voice-coil height: 0^{1/3} (8.4mm)
Magnet: 2^{13/16} (72mm)

Processed Aluminum inverted dome tweeter
Integrated crossover: 6dB/oct
Max. power: 100W
Nom. power: 50W rms


Sensitivity (2,83 V/1 m) : 90.3dB
Frequency response: 90Hz – 20kHz
Accessories: Supplied without grille



Integration **F-ISC130**

Instant gratification

2 way coaxial kit

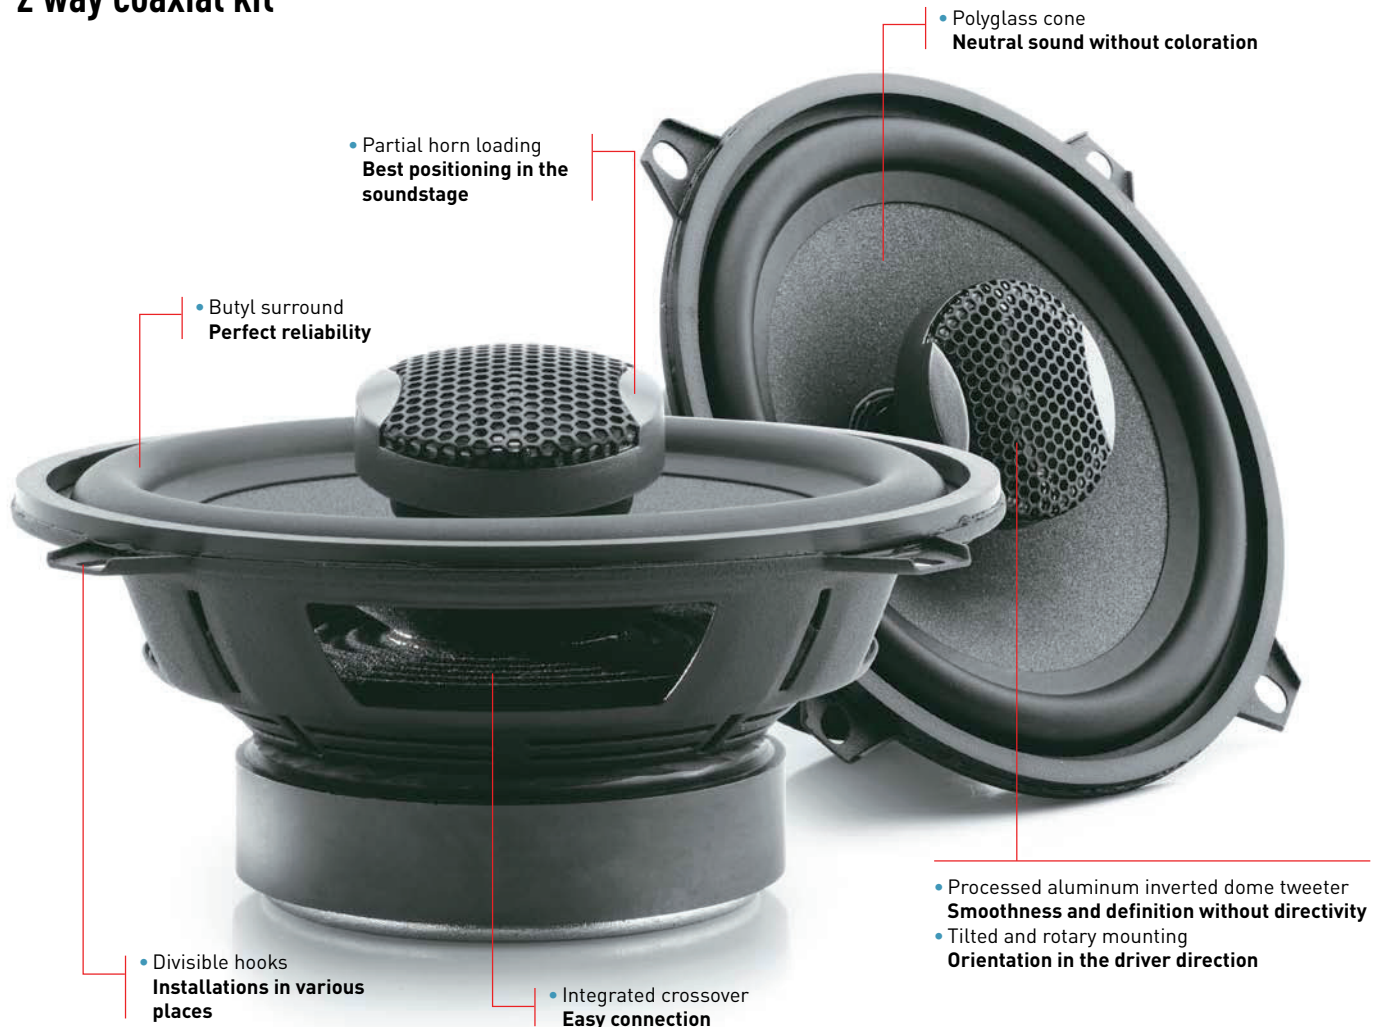

ADVANTAGES

- High sensitivity
- Shallow mounting depth (49 mm)
- Great improvement from original car speakers
- Dynamics and neutrality
- Soundstage orientation

TECHNICAL CHARACTERISTICS

Woofer: 4" (100mm)
Voice-coil diameter: 1" (25.5mm)
Voice-coil height: 0^{1/3} (8.4mm)
Magnet: 2^{13/16} (72mm)

Processed Aluminum inverted dome tweeter
Integrated crossover: 6dB/oct
Max. power: 100W
Nom. power: 50W rms

Sensitivity (2,83 V/1 m) : 90.3dB
Frequency response: 90Hz – 20kHz
Accessories: Supplied without grille



Intégration **F-ISC165**

Instant gratification

2 way coaxial kit



ADVANTAGES

- High sensitivity
- Shallow mounting depth (49.9 mm)
- Great improvement from original car speakers
- Dynamics and neutrality
- Soundstage orientation

TECHNICAL CHARACTERISTICS

Woofers: 6¹/₂" (165mm)
Voice-coil diameter: 1" (25mm)
Voice-coil height: 0¹/₄" (7mm)
Magnet: 3⁹/₁₆" (90mm)

Processed Aluminum inverted dome tweeter
Integrated crossover: 6/6dB/oct
Max. power: 140W
Nom. power: 70W rms


Sensitivity (2,83 V/1 m) : 93.2dB
Frequency response: 60Hz – 20kHz
Accessories: Supplied without grille



Integration **F-ISC570**

Instant gratification

2 way coaxial kit

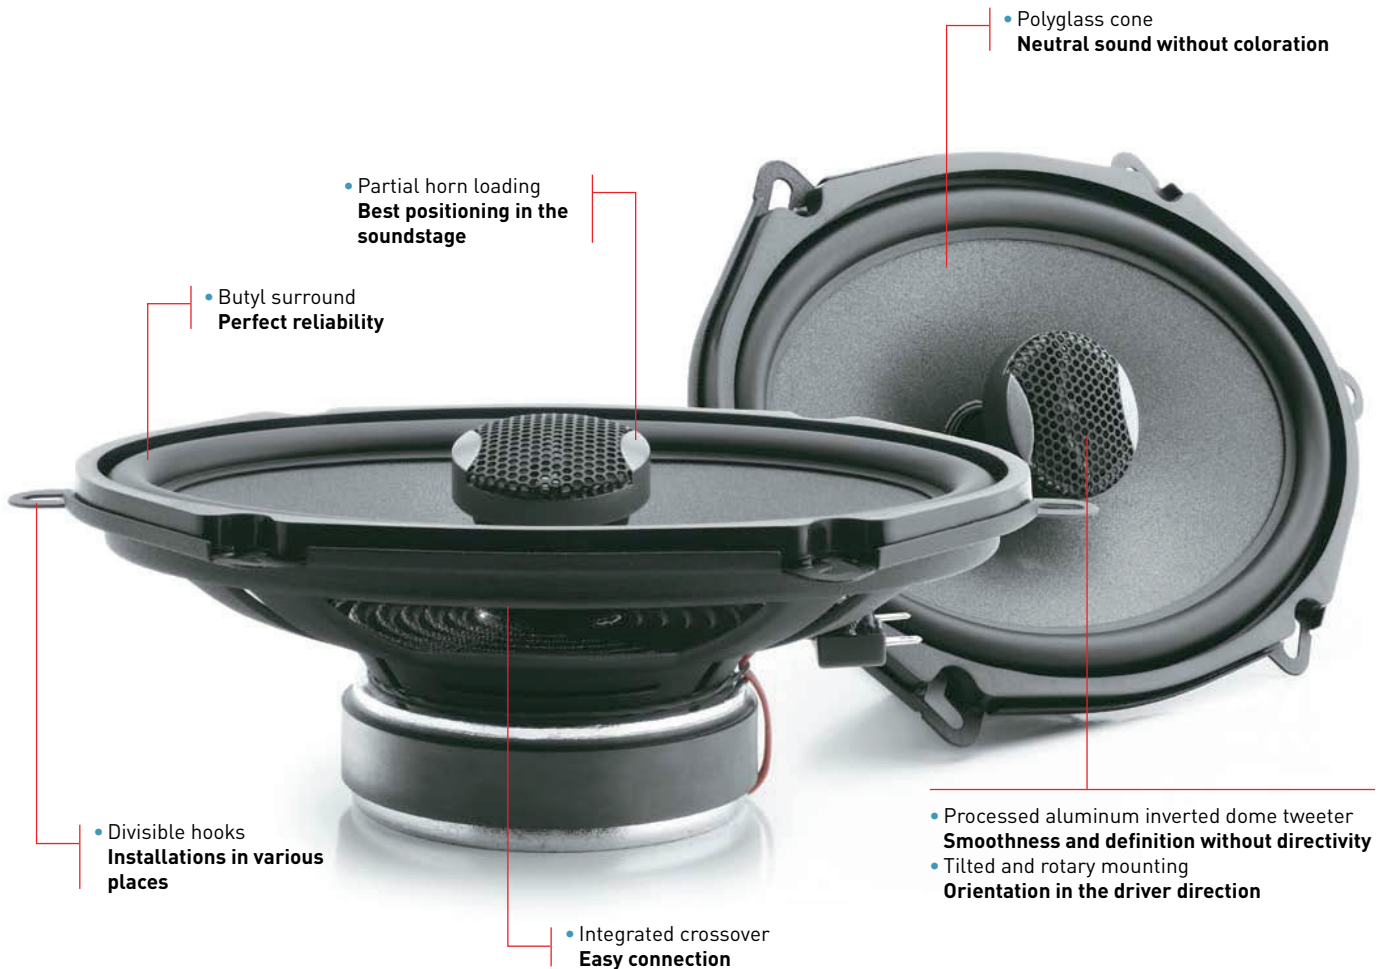

• Partial horn loading
Best positioning in the soundstage

• Butyl surround
Perfect reliability

• Polyglass cone
Neutral sound without coloration

• Divisible hooks
Installations in various places

• Integrated crossover
Easy connection

• Processed aluminum inverted dome tweeter
Smoothness and definition without directivity
• Tilted and rotary mounting
Orientation in the driver direction

ADVANTAGES

- High sensitivity
- Shallow mounting depth (59.3 mm)
- Great improvement from original car speakers
- Dynamics and neutrality
- Soundstage orientation

TECHNICAL CHARACTERISTICS

Woofers: 5x7 (130x180mm)
Voice-coil diameter: 1" (25.5mm)
Voice-coil height: 0^{7/16} (11mm)
Magnet: 3^{1/3} (85mm)

Processed Aluminum inverted dome tweeter
Integrated crossover: 6dB/oct
Max. power: 120W
Nom. power: 60W rms

Sensitivity (2,83 V/1 m) : 94.1dB
Frequency response: 65Hz – 20kHz
Accessories: Supplied without grille



2 way coaxial kit



ADVANTAGES

- High sensitivity
- Shallow mounting depth (82.5 mm)
- Great improvement from original car speakers
- Dynamics and neutrality
- Soundstage orientation

TECHNICAL CHARACTERISTICS

Woofer: 6x9" (165x237mm)

Voice-coil diameter: 1^{3/16}" (30mm)

Voice-coil height: 0^{7/16}" (10.5mm)

Magnet: 3^{7/16}" (90mm)

Processed Aluminum inverted dome tweeter

Integrated crossover: 6dB/oct

Max. power: 160W

Nom. power: 80W rms

Sensitivity (2,83 V/1 m) : 93.6dB

Frequency response: 55Hz – 20kHz

Accessories: Supplied grille